


Chameleon braille and tactile signs are installed using the included self adhesive backing. This eliminates the need for screw heads on the face of the sign.


If installing onto a rough or uneven surface an optional screw-on backing plate is available. First screw the backing plate onto the wall and then adhere the sign to the backing plate.

Chameleon braille and tactile signs conform to the NCC D3.6 and/or E4.5, however they must be installed in the correctly for full compliance. The National Construction Code D3.6 states:

- a** Signs must be installed with the braille and tactile sections of the sign in a zone between 1200mm and 1600mm above the floor / ground surface.
- b** Signs with single lines of characters must have the line of tactile characters in a zone between 1250mm and 1350mm above the floor / ground surface.

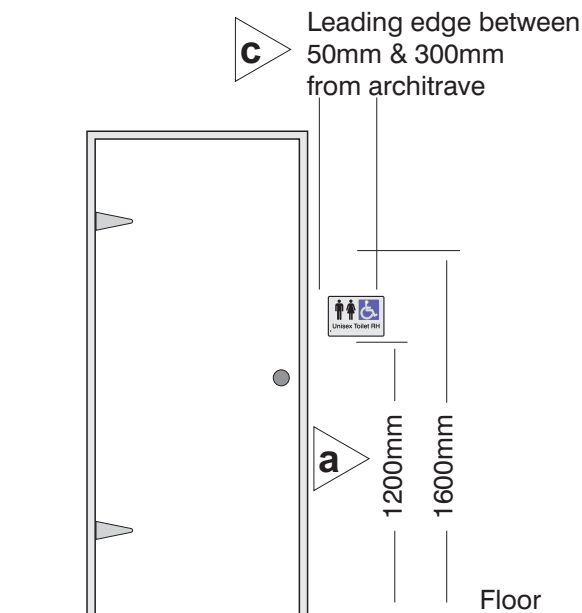

- b** For signs with a single line of characters, the sign must be installed with that line of characters positioned between 1250mm and 1350mm above the floor / ground surface.

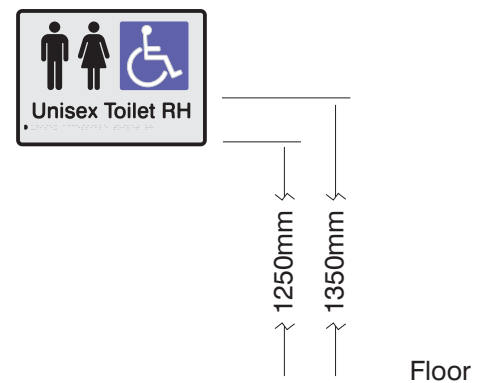

For signs identifying rooms containing facilities or features listed in the NCC D3.6, and for signs for doorways requiring an Exit Level sign in the NCC E4.5

- c** signs must be installed on the wall on the door handle side of the door with the leading edge of the sign located between 50mm and 300mm from the architrave,
- !** If installation as above is not possible, the sign may be placed on the door.
- !** Signs for doorways requiring an Exit Level sign in the NCC E4.5 must be installed on the side of the door that faces people seeking egress.
- !** Signs for ambulant toilet facilities should be installed on the cubical door.